

INSIGHTS ABOUT THE IMPACTS OF THE ASPECT RATIO AND STRENGTH OF INFILLS ON THE SEISMIC PERFORMANCE OF INFILLED RC FRAMES

Hossameldeen Mohamed
Associate Professor
Faculty of Engineering, Aswan
University

Xavier Romão
Assistant Professor
Faculdade de Engenharia da
Universidade do Porto

SUMÁRIO

Desenvolver modelos numéricos fiáveis para modelar o comportamento de paredes de enchimento é essencial, dadas as suas evidentes contribuições para o desempenho global de estruturas porticadas em betão armado. Em análises de base probabilística, a utilização de modelos de biela para simular comportamento de paredes de enchimento é frequente devido à sua simplicidade e ao seu baixo custo computacional. Porém, devido à variabilidade dos materiais e das características geométricas das paredes de enchimento, é essencial considerar estes aspetos para definir as propriedades dos modelos de biela. Neste contexto, o estudo apresentado discute os efeitos da relação altura do pórtico/comprimento do vão da parede (H/L) e da resistência da alvenaria no desempenho global de estruturas porticadas em betão armado. Para apoiar a discussão, foram analisados pórticos com três relações H/L diferentes usando uma modelação detalhada com elementos finitos e considerando três tipos de alvenaria em termos de resistência. A contribuição do painel de alvenaria para o comportamento global de cada caso foi avaliada para abordar a influência da relação H/L e da resistência da alvenaria no desempenho global das estruturas. No geral, o estudo destaca a necessidade de mais estudos que abordem a incerteza associada à utilização de expressões empíricas que não consideram adequadamente o efeito das características da parede de enchimento para definir as propriedades dos modelos de biela, nomeadamente a sua geometria e a sua resistência.

ABSTRACT

Developing reliable numerical models for infill walls has become essential given their evident contributions to the overall performance of RC frames. For probabilistic-based analyses, the single strut approach is often used to simulate masonry infills due to their inherent simplicity and their relatively low computational cost. However, due to the variability of the material and geometric characteristics of infill walls, it is essential to consider these aspects to define the properties of strut models. In this context, this study discusses the specific effects that the aspect ratio and the strength of the masonry infill have on the global performance of infilled RC frames. To support the discussion, three frames with three aspect ratios (frame height/span length) have been analysed using a detailed finite element modelling approach with three types of infills in terms of strength (weak, moderate, and strong infills). The infill contribution to the behaviour of each case was assessed to address the influence of the aspect ratio and the strength on the global performance of the infilled RC frames. Overall, the study highlights the need for further research addressing the uncertainty associated with using predefined empirical expressions that do not adequately consider the effect of certain infill characteristics, namely its geometric and mechanical characteristics, to define the properties of strut models.

Keywords: Reinforced concrete frames, numerical modelling, detailed finite element modelling, strut model.

1. INTRODUCTION

Diversity is a prominent aspect of building stocks around the world, reflecting different architectural purposes and materials. Regional-scale performance-based earthquake engineering (PBEE) studies try to reflect this diversity by considering different characteristics of reinforced concrete (RC) frames taxonomy [1, 2]. These characteristics include the building age, geometric aspects, seismic design level, etc. (see [1, 3-5] among others). In a complimentary way, the contribution of infill walls is increasingly being identified as essential for a realistic representation of the overall behaviour of RC frames, given their significant impact on performance. In this context, single strut models are found to be an efficient modelling approach for PBEE due to their simplicity and affordable computational cost. The parameters of strut models should be mostly driven by experimental data. However, due to the scarcity of such data regarding infill walls and the manifold parameters relevant for modelling their behaviour, existing PBEE studies either use strut models whose parameters are based on empirical data that might not be relevant for the structures under analysis or discard the structural contribution of infill walls altogether [6, 7]. Therefore, it is essential to develop reliable numerical models for infill walls, as they have a significant impact on the overall performance of RC frames under earthquake loading.

Strut models were developed in response to the observation by [8] that infill walls act as braces for the surrounding RC frame. Since then, several studies (e.g., see [9-14] and references therein) have been proposed to quantify the structural contribution of infills. Due to the cost and resources involved in experimental tests, existing strut model properties have typically been derived from a single test [15] with a single or a limited number of specimens, rather than from regression analyses based on a database of experimental results. As a result, the estimates of the strut model parameters have a significant level of uncertainty [16-18]. This uncertainty can be even greater when the parameters are estimated across different types of infills with various material and geometric properties, as commonly considered in regional-scale PBEE studies [18-20]. In light of this, the proposed study investigates the effect of the geometric and material variability of infill walls, more specifically the aspect ratio and the strength of the infill, on the global performance of infilled RC frames. A validated numerical modelling strategy is used to model several RC frame specimens with several aspect ratios and mechanical properties. The study highlights the urgent need to develop models that consider these parameters, and the need to define a more comprehensive approach that can accommodate the variability of infill walls.

2. RESEARCH METHODOLOGY AND MODELLING

To study the significance of the variation of infill wall characteristics, three frames with different infill walls were modelled. Table 1 presents the main characteristics of the considered cases, and Figure 1 defines these variables. Detailed Finite Element (DFE) analysis is performed using ANSYS to accurately capture the contribution of infill walls under lateral loading. The validated finite element modelling approach proposed in [21] is adopted in this study. Figure 2 shows the schematic finite element mesh components for a one-bay and one-story masonry-infilled RC frame to illustrate the adopted modelling strategy. As can be seen, RC and masonry components are modelled using the 3D solid finite element known as SOLID65 in ANSYS [22].

To reduce the number of element types and the computational effort, the smeared modelling approach is used for steel rebars, in which the SOLID65 element represents both the steel and concrete of RC members. The masonry brick units are modelled according to their real geometry, and contact elements along with a cohesive zone material model are used to represent the interaction between the brick units and the RC frame [23]. The proposed modelling approach is able to capture the more common failure mechanisms of masonry infills and the flexural failure modes of the RC elements but does not account for the shear failure of RC elements or the cyclic degradation of materials.

To focus on the contribution of the infill wall and to minimize the effect of the surrounding RC frame from the analysis, the authors adopted the approach proposed by [14]. More specifically, for each specimen listed in Table 1, the corresponding bare RC frame was analysed using the same numerical model as for the infilled frame. The contribution of the infill wall to overall behaviour was then extracted by subtracting the results of the bare frame analysis from the results of the infilled frame analysis.

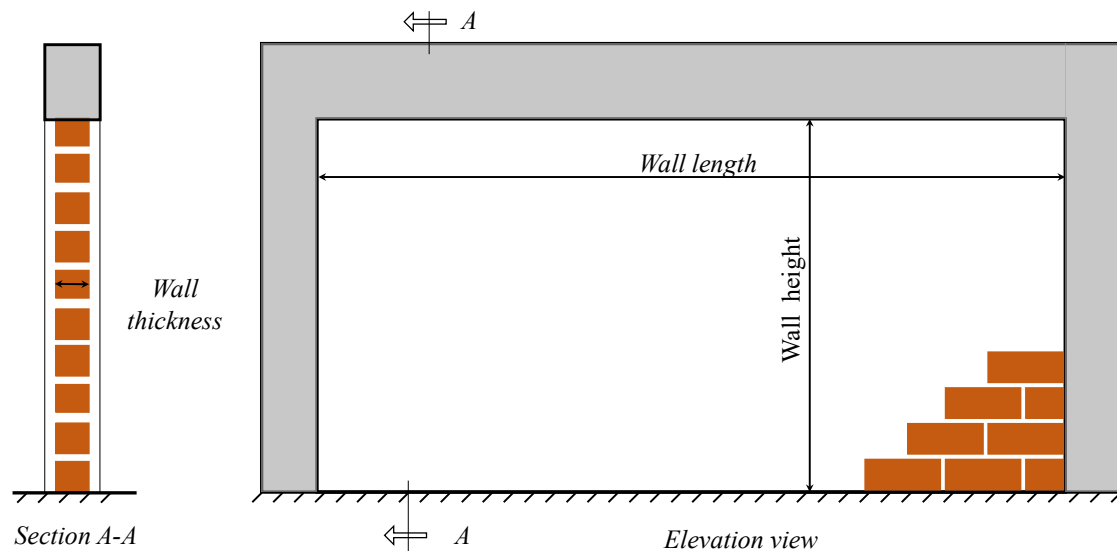


Figure 1 Definition of the considered wall variables defined in Table 1.

Table 1 The main characteristics of the considered specimens.

no	Specimen ID	Wall length L (mm)	Height H (mm)	Aspect ratio a^*	Infill strength classification	Masonry compressive strength f_m MPa	Wall thickness
1	WR1	900	1150.00	0.65	Weak	1.00	110
2	WR2	1800	1150.00	1.60		1.00	110
3	WR3	2550	1150.00	2.20		1.00	110
4	MR1	900	1150.00	0.65	Moderate	3.00	110
5	MR2	1800	1150.00	1.60		3.00	110
6	MR3	2550	1150.00	2.20		3.00	110
7	SR1	900	1150.00	0.65	Strong	7.00	110
8	SR2	1800	1150.00	1.60		7.00	110
9	SR3	2550	1150.00	2.20		7.00	110

*a is the aspect ratio of the panel expressed as the wall length over its height (L/H)

The columns of RC frames were set to be 150*150 mm², the beam cross-sections were 150*250 mm mm², and the concrete compressive strength is 30 MPa

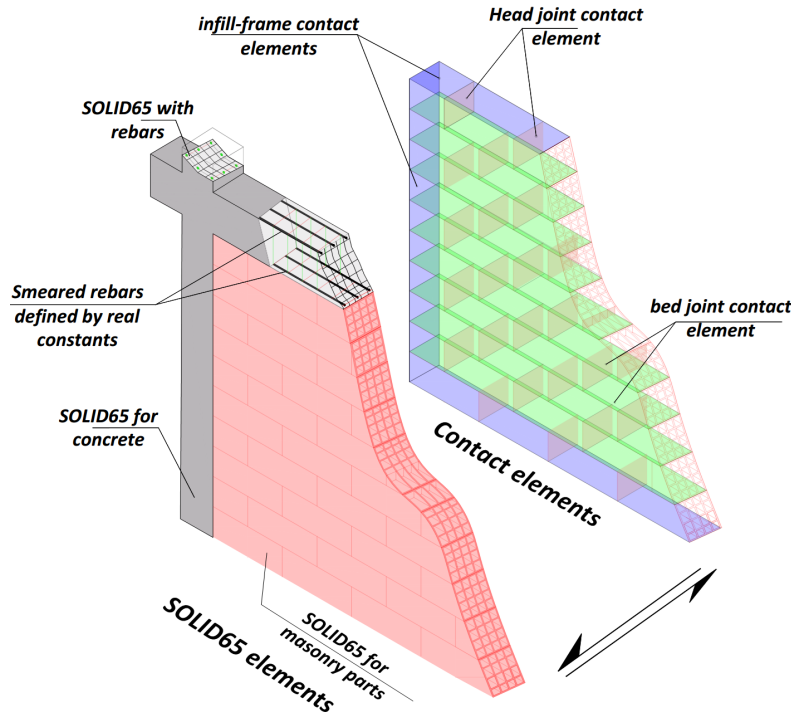


Figure 2 Adopted modelling strategy for RC element and infill walls.

3. RESULTS AND DISCUSSION

3.1. Capacity curves of the infilled frames and of the infills

The capacity curves of RC infilled frames provide comprehensive information to achieve a better understanding of their seismic behaviour. As such, capacity curves were determined numerically by applying a monotonically increasing lateral displacement at the top of each frame until reaching a lateral drift value of 1.2%. Figure 3 shows the capacity curves for three types of infills (weak, moderate, and strong) with three different aspect ratios ($a=0.65$, $a=1.60$, and $a=2.20$). As can be seen, infilled frames with weak infills exhibit lower lateral strength, thus highlighting the lower contribution of infills to the overall lateral strength of the structure. However, weak infilled panels in narrow infill walls show a monotonic increase in strength up to a top drift of 1.2%, which is not the case for the other two types of infills, where strength degradation is observed after a lower drift ratio. This observation can be interpreted as follows. Stronger infills are more likely to lose their integrity sooner because they exhibit higher stresses due to their higher strength and stiffness. For the moderate infills, the panels show a gradual increase in strength up to a top drift of 0.70%, followed by a gradual decrease in strength. This behaviour is attributed to the fact that moderate infills are able to sustain some damage before losing their integrity. Eventually, strong infilled panels show a sudden drop in strength after a top drift of 0.8%. This behaviour is attributed to the fact that strong infills are not able to sustain much damage before losing their integrity.

The aspect ratio of the infilled panel is seen to have a significant impact on its seismic behaviour. Narrower panels (i.e., $a=0.65$) show less strength capacity but have a more ductile behaviour with no sudden drop in strength, as seen in cases with strong infills (e.g., see Figure 3 c). In these cases, the overall behaviour of the infilled frame is closer to that of the corresponding bare frame. This is in contrast to the capacity curves of strong infilled panels with high aspect ratios, which typically show a sudden drop in strength at specific stage of loading (the point in which the infill starts to lose its integrity). The capacity curves of infilled panels show that the type of infill and the aspect ratio of the panel have a significant impact on their seismic behaviour.

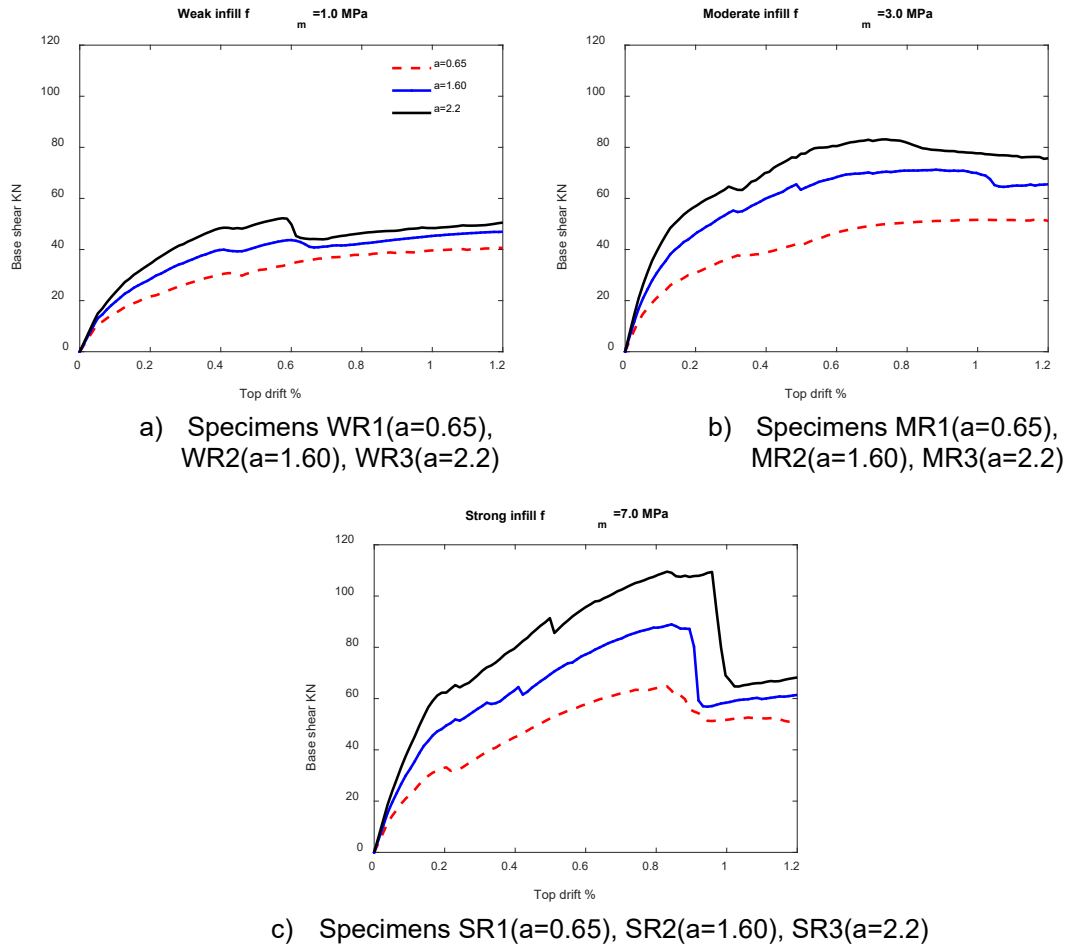


Figure 3 Variation of RC frame with masonry infills with different aspect ratios a) weak infills b) moderate infills and c strong infills.

In order to gain a more comprehensive understanding of the contribution of the infill to the overall behaviour of the infilled frame, and to minimize the influence of the surrounding RC frame, the infill contributions were extracted from the previously shown capacity curves using the method proposed by [14]. This method involves isolating the infill from the RC frame and determining its independent lateral load-carrying capacity. The infill contributions can then be used to assess the relative importance of the infill to the overall strength and stiffness of the infilled frame. Figure 4 shows the capacity curves of the infilled panels obtained by this process for the different aspect ratios and masonry compressive strengths, plotted as horizontal force against top drift ratio (in percentage). It can be seen that narrow panels with an aspect ratio of 0.65 sustain less lateral force, but do not exhibit a sudden drop in strength when compared to wider panels. This effect is more pronounced for stronger infills, which show a sudden drop of up to two-thirds of their overall lateral strength.

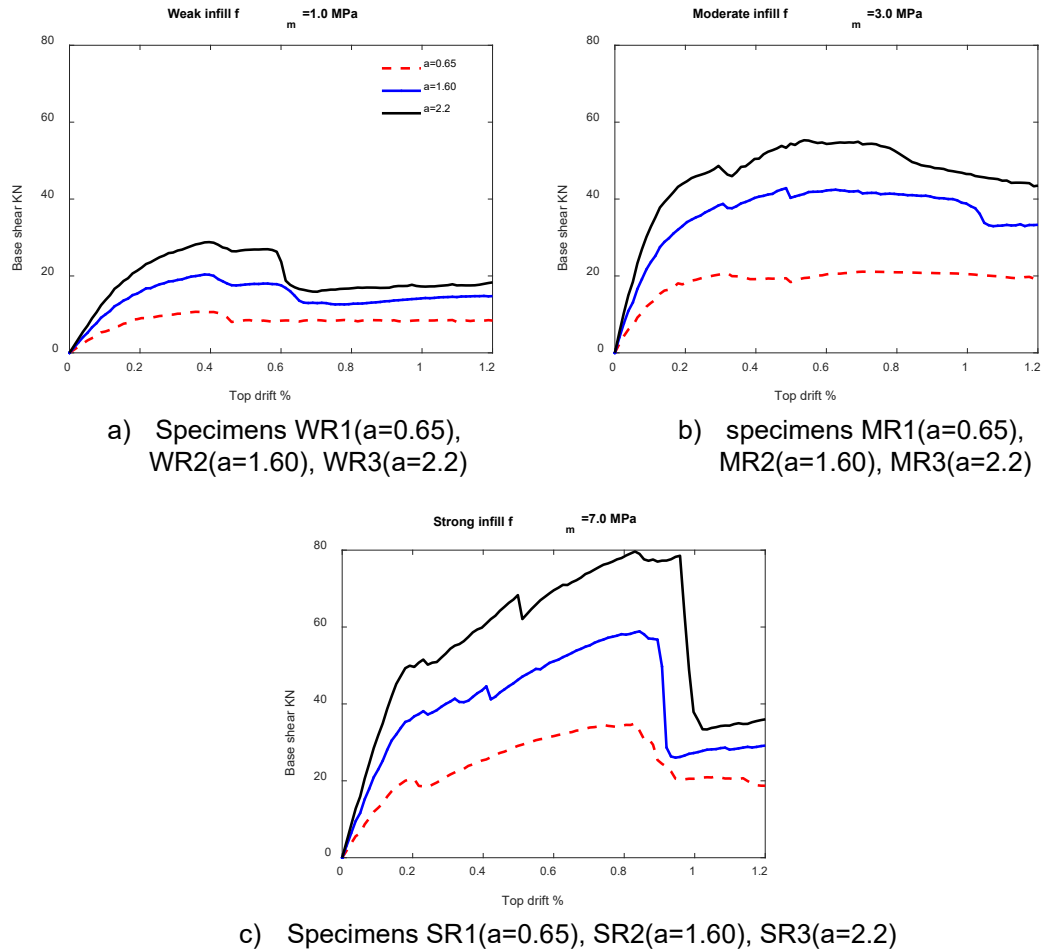


Figure 4 Contribution of infill walls with different aspect ratios a) weak infills b) moderate infills and c) strong infills.

For a more comprehensive understanding, Figure 5 and Figure 6 show the variation of the top drift ratio (corresponding to the maximum lateral force) and maximum lateral of the infilled panel, respectively, with the aspect ratio of the panel and masonry compressive strength. In these plots, it is clear that the panel aspect ratio has less effect on the top drift ratio corresponding to the maximum force than the strength of the masonry. In other words, low-strength infills will reach their damage state significantly faster than high-strength infills. This is important for PBEE analyses, since damage state limits are essential for estimating earthquake losses. In contrast, the maximum lateral force of the panel is significantly affected by both the strength of the masonry and the aspect ratio of the panel.

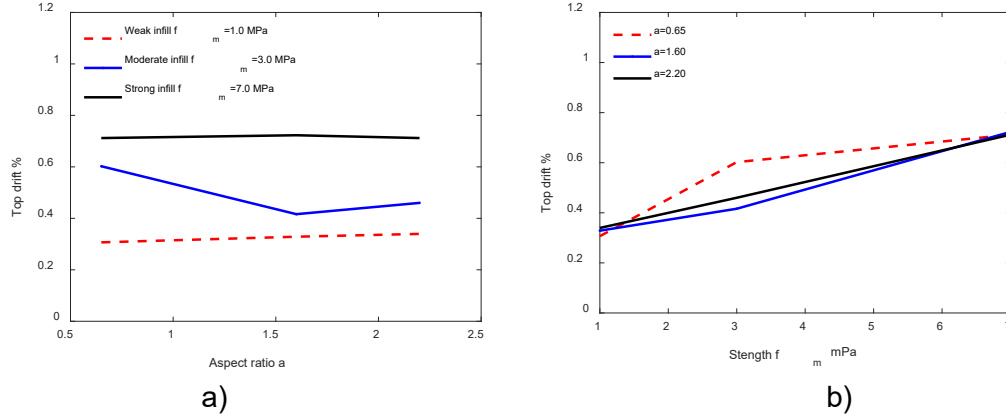


Figure 5 Variation of drift corresponding to maximum strength with a) aspect ratio b) strength of masonry.

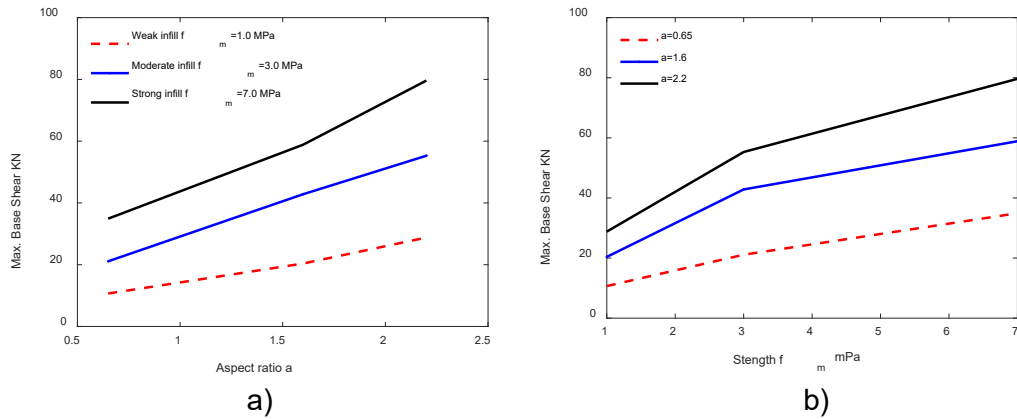


Figure 6 Variation of drift corresponding to maximum strength with a) aspect ratio b) strength of masonry.

3.2. Reliability of existing models

As mentioned in the previous section, existing empirical models are derived from a limited number of specimens, which may limit their ability to represent a wide range of infill wall geometries and strengths. In this context, Figure 7 shows a scatter plot of the observed lateral contribution of infill walls against the empirically estimated values based on commonly used models in literature [24-29]. From these results, it is clear that none of these models accurately estimated the observed lateral strength for different infill panel characteristics or exhibited a uniform uncertainty around the real values. Moreover, some models overestimated or underestimated the lateral strength by a large margin. These observations suggest that the infill wall aspect ratio and strength can significantly influence the structural behaviour.

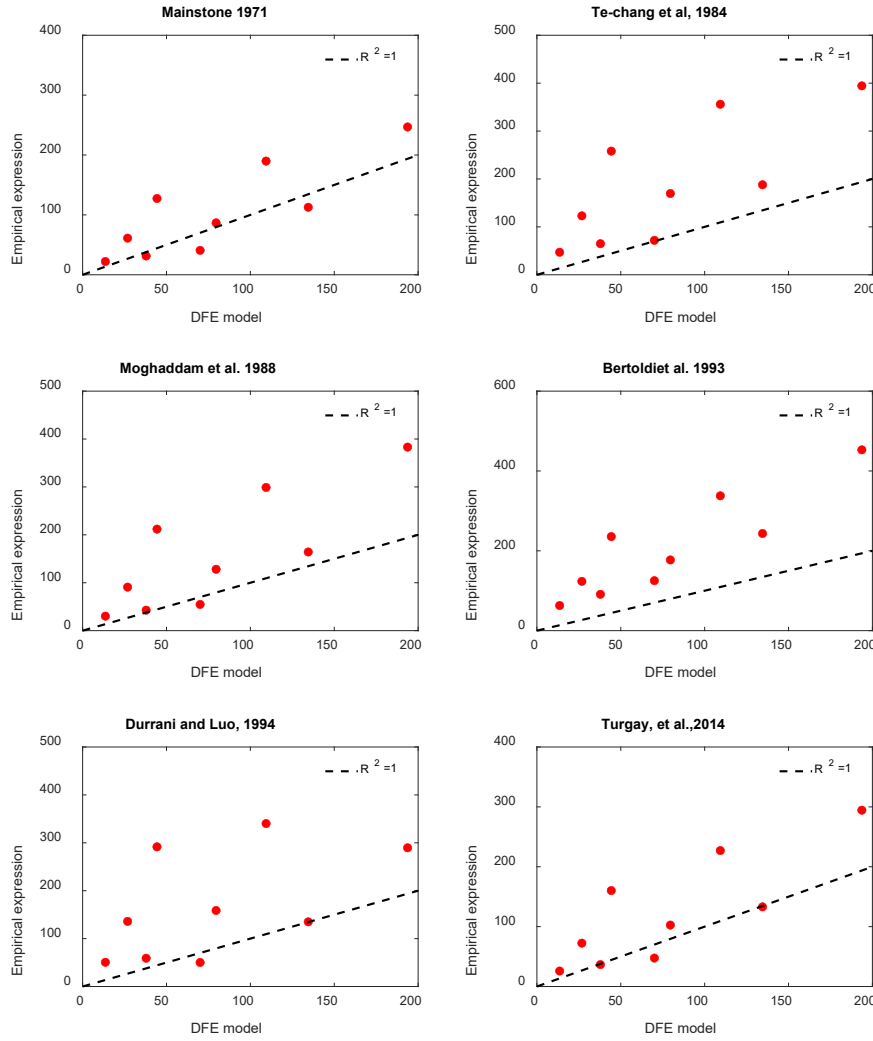


Figure 7 Scatter plots representing estimated infill contribution in terms of strength using different empirical expressions versus the strength obtained from the detailed finite element model.

4. CONCLUSION

Single strut models are widely used in PBEE analyses due to their advantages in terms of modelling and computational cost. However, their use for modelling the behaviour of buildings with different infill characteristics can lead to inaccurate results, as they are typically derived from a limited number of experimental tests. This results in significant uncertainties in the estimated parameters of the infill mechanical characteristics, which is even greater when the parameters are generalized across different types of infill with various material and geometric properties.

To shed light on this issue, the proposed study investigates the effect of variations in geometric and material properties of infill walls on the global performance of infilled RC frames. Results indicate that both the aspect ratio and the compressive strength of the masonry have a significant impact on the overall performance of RC frames with masonry infills. Furthermore, none of the tested empirical expressions were able to predict the expected behaviour of the infill walls modelled using a detailed finite element approach. The study highlights the need for empirical models that define the mechanical characteristics of strut models to consider these parameters, and the need to define a more comprehensive approach that can accommodate the variability of characteristics of infill walls.

5. AKNOWLEDGEMENTS

This work is financially supported by Base Funding -UIDB/04708/2020 and Programmatic Funding- UIDP/04708/2020 of the CONSTRUCT -Instituto de I&D em Estruturas e Construções - funded by national funds through the FCT/MCTES (PIDDAC).

6. REFERENCES

- [1] H. Crowley *et al.*, "Model of seismic design lateral force levels for the existing reinforced concrete European building stock," *Bulletin of Earthquake Engineering*, vol. 19, no. 7, pp. 2839-2865, 2021/05/01 2021, doi: 10.1007/s10518-021-01083-3.
- [2] H. Crowley, R. Pinho, and J. J. Bommer, "A Probabilistic Displacement-based Vulnerability Assessment Procedure for Earthquake Loss Estimation," *Bulletin of Earthquake Engineering*, vol. 2, no. 2, pp. 173-219, 2004/01/01 2004, doi: 10.1007/s10518-004-2290-8.
- [3] H. Crowley *et al.*, "European Seismic Risk Model – Insights and Emerging Research Topics," in *Progresses in European Earthquake Engineering and Seismology*, Cham, R. Vacareanu and C. Ionescu, Eds., 2022// 2022: Springer International Publishing, pp. 161-178.
- [4] L. Martins and V. Silva, "Development of a fragility and vulnerability model for global seismic risk analyses," *Bulletin of Earthquake Engineering*, 2020-06-08 2020, doi: 10.1007/s10518-020-00885-1.
- [5] M. Villar-Vega *et al.*, "Development of a fragility model for the residential building stock in South America," *Earthquake Spectra*, vol. 33, no. 2, pp. 581-604, 2017.
- [6] M. T. De Risi *et al.*, "Modelling and Seismic Response Analysis of Italian pre-code and low-code Reinforced Concrete Buildings. Part I: Bare Frames," *Journal of Earthquake Engineering*, pp. 1-32, 2022-05-25 2022, doi: 10.1080/13632469.2022.2074919.
- [7] M. Di Domenico *et al.*, "Modelling and Seismic Response Analysis of Italian Pre-Code and Low-Code Reinforced Concrete Buildings. Part II: Infilled Frames," *Journal of Earthquake Engineering*, pp. 1-31, 2022-06-16 2022, doi: 10.1080/13632469.2022.2086189.
- [8] S. V. Polyakov, "Masonry in Framed Buildings : An Investigation into the Strength and Stiffness of Masonry Infilling. "Gosudarstvennoe izdatel'stvo Literaturny po stroitel'stvu i arkhitekture", Moscow Russia," (English translation by G. L. Cairns, National Lending Library for Science and Technology, Boston, Yorkshire, England, 1963). 1956.
- [9] P. G. Asteris, S. T. Antoniou, D. S. Sophianopoulos, and C. Z. Chrysostomou, "Mathematical Macromodeling of Infilled Frames: State of the Art," *Journal of Structural Engineering*, vol. 137, no. 12, pp. 1508-1517, 2011, doi: 10.1061/(asce)st.1943-541x.0000384.
- [10] P. Asteris, D. Cotsovos, C. Chrysostomou, A. Mohebbkhah, and G. Al-Chaar, "Mathematical micromodeling of infilled frames: state of the art," *Engineering Structures*, vol. 56, pp. 1905-1921, 2013, doi: <http://dx.doi.org/10.1016/j.engstruct.2013.08.010>.
- [11] S. H. Basha, S. Surendran, and H. B. Kaushik, "Empirical Models for Lateral Stiffness and Strength of Masonry-Infilled RC Frames Considering the Influence of Openings," *Journal of Structural Engineering*, vol. 146, no. 4, p. 04020021, 2020, doi: doi:10.1061/(ASCE)ST.1943-541X.0002562.
- [12] N. Mohammad Noh, L. Liberatore, F. Mollaioli, and S. Tesfamariam, "Modelling of masonry infilled RC frames subjected to cyclic loads: State of the art review and modelling with OpenSees," *Engineering Structures*, vol. 150, pp. 599-621, 11/1/ 2017, doi: <https://doi.org/10.1016/j.engstruct.2017.07.002>.
- [13] H. Mohamed and X. Romão, "Analysis of the performance of strut models to simulate the seismic behaviour of masonry infills in partially infilled RC frames,"

Engineering Structures, vol. 222, p. 111124, 2020/11/01/ 2020, doi: <https://doi.org/10.1016/j.engstruct.2020.111124>.

[14] H. Mohamed and X. Romão, "Robust Calibration of Macro-Models for the In-Plane Behavior of Masonry Infilled RC Frames," *Journal of Earthquake Engineering*, pp. 1-27, 2021, doi: 10.1080/13632469.2018.1517703.

[15] L. Liberatore, F. Noto, F. Mollaioli, and P. Franchin, "Comparative assessment of strut models for the modelling of in-plane seismic response of infill walls," in *Proc., 6th ECCOMAS Thematic Conf. on Computational Methods in Structural Dynamics and Earthquake Engineering*, 2017.

[16] H. Huang, H. V. Burton, and S. Sattar, "Development and Utilization of a Database of Infilled Frame Experiments for Numerical Modeling," *Journal of Structural Engineering*, vol. 146, no. 6, p. 04020079, 2020, doi: doi:10.1061/(ASCE)ST.1943-541X.0002608.

[17] M. T. De Risi, C. Del Gaudio, P. Ricci, and G. M. Verderame, "In-plane behaviour and damage assessment of masonry infills with hollow clay bricks in RC frames," *Engineering Structures*, vol. 168, pp. 257-275, 2018/08/01/ 2018, doi: <https://doi.org/10.1016/j.engstruct.2018.04.065>.

[18] H. Mohamed and X. Romão, "Simplified modelling of in-plane behaviour of masonry infilled RC frames under seismic loading: advantages and barriers," in *The 16th European Conference on Earthquake Engineering*, Thessaloniki, Greece, June 18-21, 2018 2018.

[19] C. Del Gaudio, M. T. De Risi, P. Ricci, and G. M. Verderame, "Empirical drift-fragility functions and loss estimation for infills in reinforced concrete frames under seismic loading," *Bulletin of Earthquake Engineering*, journal article vol. 17, no. 3, pp. 1285-1330, October 24 2018, doi: 10.1007/s10518-018-0501-y.

[20] P. G. Asteris *et al.*, "Stochastic Vulnerability Assessment of Masonry Structures: Concepts, Modeling and Restoration Aspects," *Applied Sciences*, vol. 9, no. 2, p. 243, 2019-01-10 2019, doi: 10.3390/app9020243.

[21] H. Mohamed and X. Romão, "Performance analysis of a detailed FE modelling strategy to simulate the behaviour of masonry-infilled RC frames under cyclic loading," *Earthquakes and Structures*, vol. 14, no. 6, pp. 551-565, 2018.

[22] A. I. Company. Theory reference for the mechanical APDL and mechanical applications Release 14.5, Canonsburg, PA, USA, 2012.

[23] P. Lourenço and J. Rots, "Multisurface Interface Model for Analysis of Masonry Structures," *Journal of Engineering Mechanics*, vol. 123, no. 7, pp. 660-668, 1997, doi: doi:10.1061/(ASCE)0733-9399(1997)123:7(660).

[24] R. J. Mainstone, "On The stiffness and strengths of infilled frames," *ICE Proceedings*, vol. 49, no. 2, p. 230. [Online]. Available: <http://www.icevirtuallibrary.com/content/article/10.1680/iicep.1971.6267>

[25] L. Te-Chang and K. Kwok-Hung, "Nonlinear behaviour of non-integral infilled frames," *Computers & Structures*, vol. 18, no. 3, pp. 551-560, 1984.

[26] H. Moghaddam and P. Dowling, "Earthquake resistant design of brick infilled frame," *Proceedings of the Eighth International Brick and Block Masonry Conference*, pp. 774-784, 1988.

[27] S. Bertoldi, L. Decanini, and C. Gavarini, "Telai tamponati soggetti ad azioni sismiche, un modello semplificato, confronto sperimentale e numerico," (in Italian), *Atti Del 6 Conv. Naz. Ing. Sism. It*, vol. 2, pp. 815-824, 1993.

[28] A. J. Durrani and Y. H. Luo, "Seismic retrofit of flat-slab buildings with masonry infills," in *Proceedings Nceer Workshop on Seismic Response of Masonry Infills*, 1994: National Center for Earthquake Engineering Research (NCEER).

[29] T. Turgay, M. C. Durmus, B. Binici, and G. Ozcebe, "Evaluation of the Predictive Models for Stiffness, Strength, and Deformation Capacity of RC Frames with Masonry Infill Walls," *Journal of Structural Engineering*, vol. 140, no. 10, 2014.